


BASKET & JET FANS

BASKET FAN 36 DD

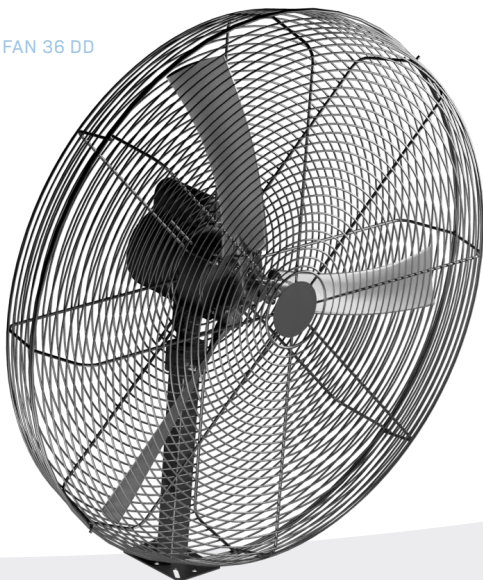

With high-velocity targeted airflow, our Basket fans and Jet fans are made to provide reliable velocity cooling for your employees and animals. With their compact size, they're easy to install and don't get in the way of your farm equipment even in the most demanding environments.

They are the best choice of ventilation for small or hard to ventilate areas like barns with very low ceilings, milking parlors and robots.

PEAK PERFORMANCES


Basket fan 24: 5 840 CFM
Basket fan 36: 9 300 CFM
Jet fan 16: 1 910 CFM
Jet fan 20: 3 670 CFM
Jet fan 36: 9 860 CFM

WARRANTY

3-year warranty on entire fan*
5-year warranty on blades
10-year warranty on housing

*not including belts and tighteners

JET FAN 20 DD

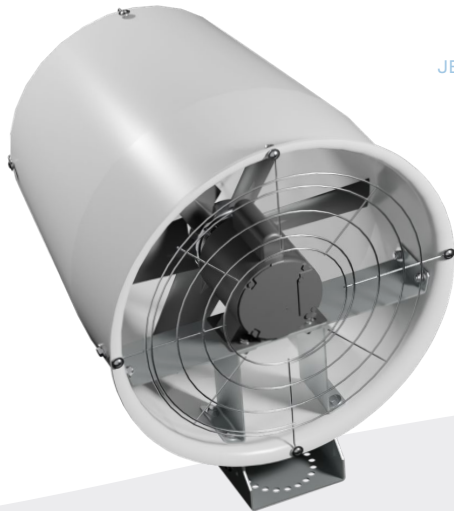

OPTIONS

- Basket fans are available in sizes

Model	24	36
Inch	24"	36"

- Jet fans are available in sizes

Model	16	20	36
Inch	16"	20"	36"

- High Output and High Efficiency models
- Save electricity with our Variable speed options

FEATURES & BENEFITS

- Housing made of a durable fiberglass composite for UV-resistant and corrosion-free product
- Powder-coated guards for longevity
- Nylon blades on all models
- Direct drive motors
- cULus or CE certified motors
- Stainless Steel Hardware

PERFORMANCE

60Hz Regions

BASKET FANS

Model	Drive	Ph	Volt	Hz	HP [kW]	Amps	RPM	Speed	Watts	lbf	lbf/kW	CFM	CFM/W
24	DD	1	230	60	1/2 [0.37]	2.8	1 390	100%	576	7.0	12.2	5 840	10.1
36	DD	1	230	60	1/2 [0.37]	3.1	843	100%	575	7.8	13.5	9 250	16.1
	DD	3	460	60	1/2 [0.37]	1.3	849	100%	495	7.9	15.9	9 300	18.8


JET FANS

Model	Drive	Ph	Volt	Hz	HP [kW]	Amps	RPM	Speed	Watts	lbf	lbf/kW	CFM	CFM/W
16	DD	1	230	60	1/3 [0.25]	2.2	1 620	100%	380	1.70	4.5	1 910	5.0
20	DD	1	230	60	1/3 [0.25]	2.2	1 582	100%	429	4.10	9.5	3 670	8.5
36	DD	3	460	60	1/2 [0.37]	1.3	855	100%	470	8.80	18.7	9 860	21.0

1) All fans are tested in accordance with AMCA 230-15 standard.

2) Other motor configuration available

COVERAGE AREA

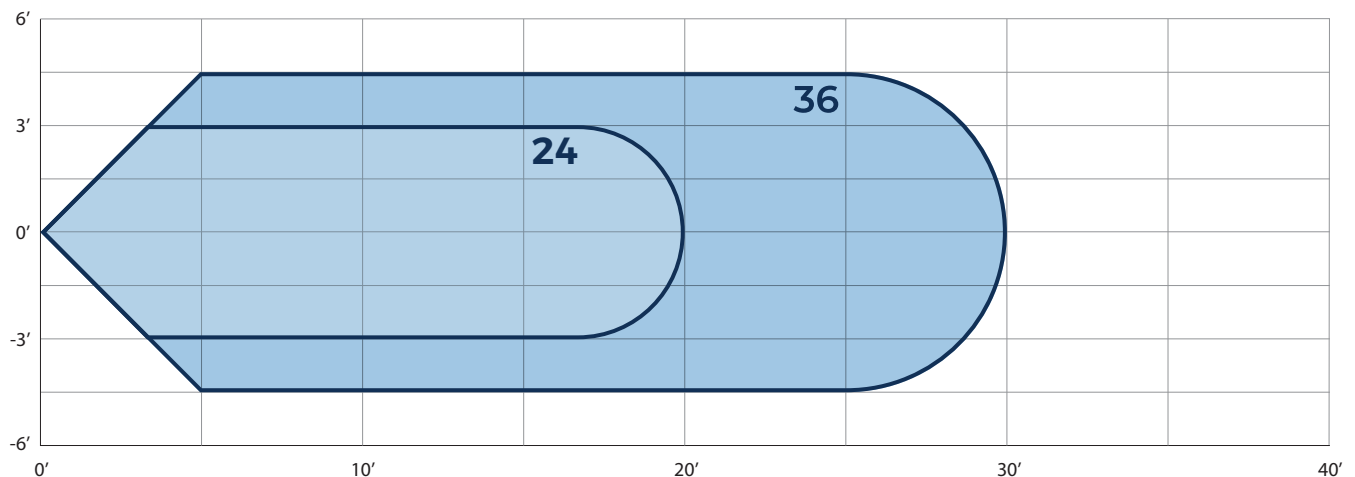

* Coverage area is based on an average airspeed of 400 FPM at cow level (3' above ground). Some regions require 600 FPM, consult our representative.

DIMENSIONS (inch)

BASKET FANS

Model	24	36
Fan dia.	24"	36"
A	27 1/2"	41 3/8"
B	27 1/2"	41 3/8"
C	14 1/8"	14 1/8"

JET FANS

Model	16	20	36
Fan dia.	16"	20"	36"
A	19 1/8"	23"	44 1/4"
B	22"	26 1/8"	45 7/8"
C	24"	24 3/8"	15 3/8"

