


BASKET & JET FANS

COOLING THE TIGHT SPACES

BASKET FAN 36 DD

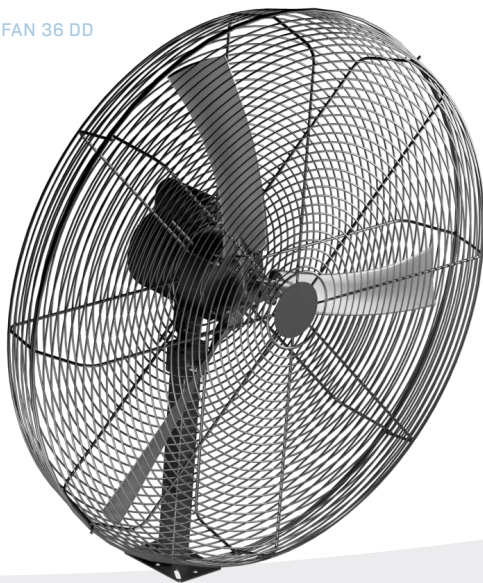

With high-velocity targeted airflow, our Basket fans and Jet fans are made to provide reliable velocity cooling for your employees and animals. With their compact size, they're easy to install and don't get in the way of your farm equipment even in the most demanding environments.

They are the best choice of ventilation for small or hard to ventilate areas like barns with very low ceilings, milking parlors and robots.

PEAK PERFORMANCES

Basket fan 24: 9 025 m³/h

Basket fan 36: 15 000 m³/h

Jet fan 16: 2 560 m³/h

Jet fan 20: 5 830 m³/h

Jet fan 36: 14 800 m³/h

WARRANTY

3-year warranty on entire fan*

5-year warranty on blades

10-year warranty on housing

*not including belts and tighteners

JET FAN 20 DD



OPTIONS

- Basket fans are available in sizes

Model	24	36
mm	610	915

- Jet fans are available in sizes

Model	16	20	36
mm	406	508	915

- High Output and High Efficiency models
- Save electricity with our Variable speed options

FEATURES & BENEFITS

- Housing made of a durable fiberglass composite for UV-resistant and corrosion-free product
- Powder-coated guards for longevity
- Nylon blades on all models
- Direct drive motors
- cULus or CE certified motors
- Stainless Steel Hardware



PERFORMANCE

50Hz Regions

BASKET FANS

Model	Drive	Ph	Volt	Hz	kW	Amps	RPM	Speed	Watts	N	N/kW	m³/h	W/1000m³/h
24	DD	1	230	50	0,37	3,0	1 390	100%	494	25,8	52,2	9 025	54,8
36		1	230	50	0,37	3,0	927	100%	433	30,9	71,1	14 900	29,2
		3	400	50	0,37	1,3	924	100%	434	31,3	72,3	14 998	28,9


JET FANS

Model	Drive	Ph	Volt	Hz	kW	Amps	RPM	Speed	Watts	N	N/kW	m³/h	W/1000m³/h
16	DD	1	230	50	0,25	2,4	1 383	100%	281	4,7	16,7	2 560	110
20		1	230	50	0,25	2,4	1 334	100%	370	15,9	43,0	5 830	63,5
36		3	400	50	0,37	1,3	930	100%	405	30,5	75,2	14 800	27,4

1) All fans are tested in accordance with AMCA 230-15 standard.

2) Other motor configuration available

COVERAGE AREA

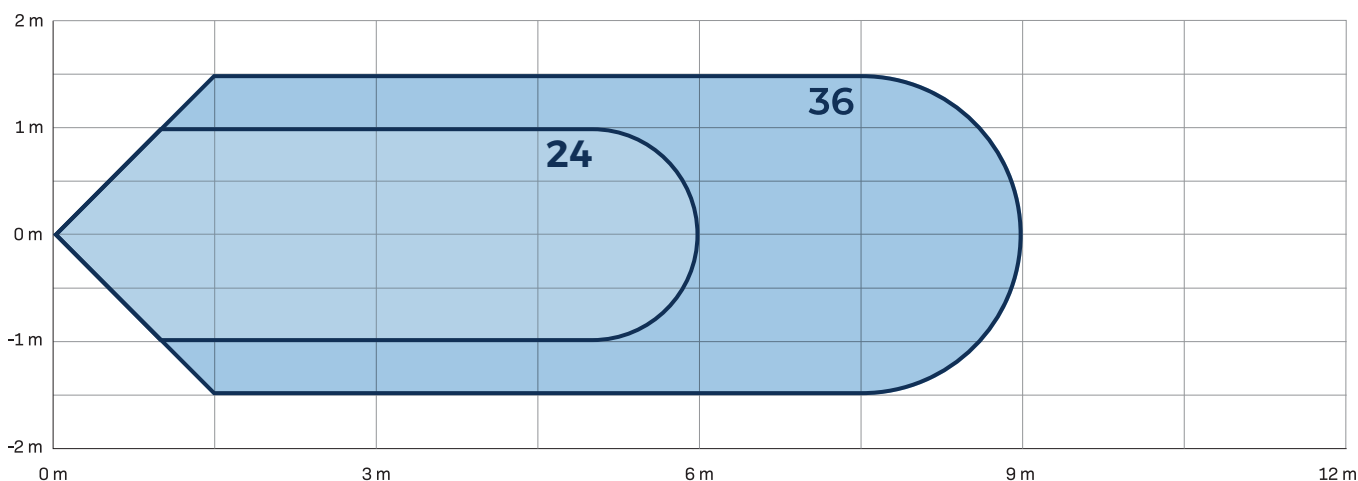

* Coverage area is based on an average airspeed of 2 m/s at cow level (1 meter above ground). Some regions require 3m/s, consult our representative.

DIMENSIONS (mm)

BASKET FANS

Model	24	36
Fan dia.	610	915
A	700	1 050
B	700	1 050
C	360	360

JET FANS

Model	16	20	36
Fan dia.	406	508	915
A	485	585	1 125
B	560	665	1 165
C	610	620	390

